






# LB-15MK-II SUBWOOFER



## Features LB-15MK-II

- 15" Speaker (4"/100mm voice coil)
- bass reflex design
- rigging (flying) hardware integrated
- M20 pole mount plate
- 2 Neutrik speakon 4-pin
- bass link function
- perforated steel front grill powder coated
- acoustic foam 4mm behind front grill
- 4 x rubber feet
- stackable
- wood housing plywood
- polyurea (PU) high scratch proof coating
- optional regular painting black or white

**SYSTEM 530**  
for stacking and rigging

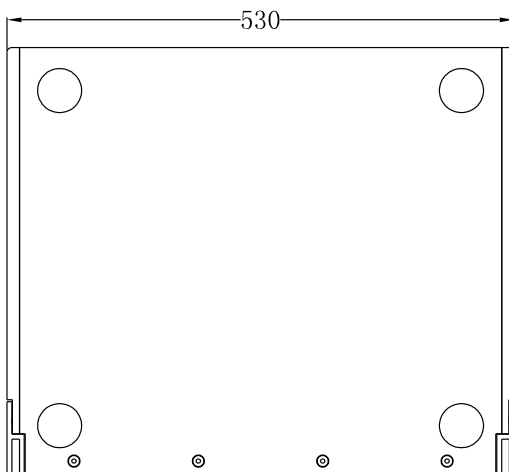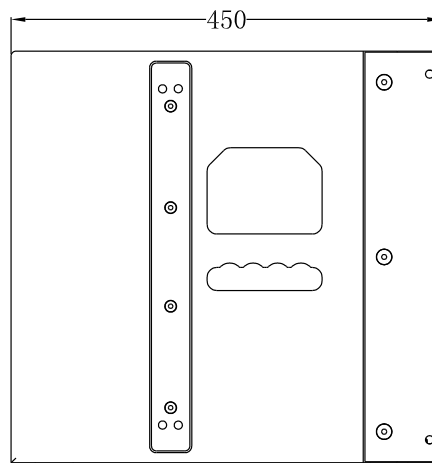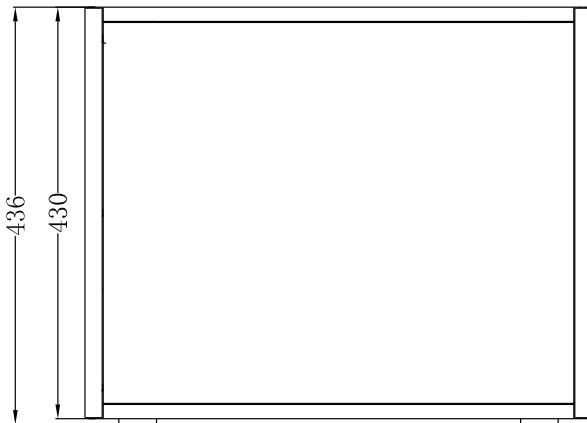

## specification

model	LB-15MK-II
rated impedance (optional)	8Ω (16Ω)
power handling capacity AES/peak*	1000W / 3000W*
available frequency response**	45Hz-250Hz
max. sound pressure level***	132dB
LF-transducer rated size	15"
LF-transducer voice coil diameter	4"/100mm
LF-transducer magnet structure	ferrite
dimension w/h/d in mm	530/430/450
weight	28kg

\* peak 10ms, with TD-8000 amplifier and LB-15MK-II max controller setup

\*\* -10dB with LB-15MK-II FR controller setup

\*\*\*1m free field, pink noise, crest factor 10dB, with TD-8000 and LB-15MK-II SPL controller setup