

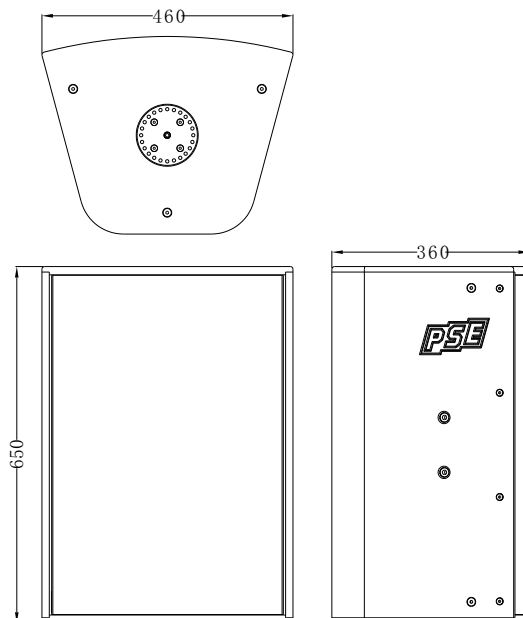


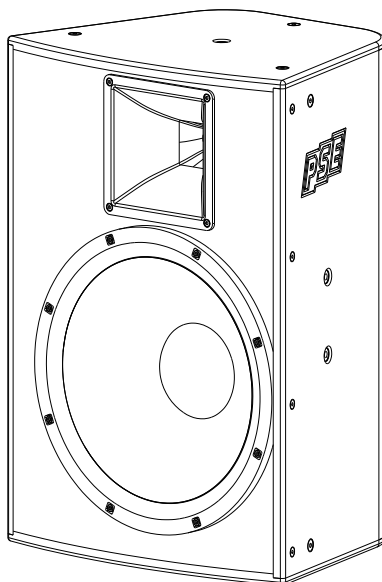

IPS-15



specification

model	IPS-15
rated impedance	8 Ω
operation mode	passive
power handling capacity passive AES/peak*	800W / 3200W*
available frequency response**	50Hz-20kHz
max. sound pressure level***	139dB
directivity (h x v)	90°/60° (90° rotatable)
LF-transducer rated size	15"
LF-transducer voice coil diameter	100mm/4"
LF-transducer magnet structure	ferrite
HF-compression driver rated size (VC)	75mm/3"
HF-compression throat diameter	1.4"
HF-compression magnet structure	ferrite
dimension h/w/d in mm	650/460/360
weight	35kg

* peak 10ms, with TD-8000 amplifier and IPS-15 max controller setup

** -10dB with IPS-15 FR controller setup

***1m free field, pink noise, crest factor 10dB, with TD-8000 and IPS-15 SPL controller setup

Features IPS-15

- 1x15" speaker ferrite (100mm/4" voice coil)
- 1x3" (75mm) compression driver ferrite
- high frequency horn 1.4" throat
- horn directivity h90°/v60°
- 90° turnable high frequency horn to v60°/h90°
- trapezoid housing
- 6 + 12 M8 mounting points
- 1 M10 mounting point
- 1 multi gauge plate 360° / 15° steps
- 2 Neutrik speakon 4-pin
- bass link function
- high-mid link function
- perforated steel front grill powder coated
- acoustic foam 10mm
- wood housing class A MDF 15mm
- polyurea (PU) high scratch proof coating
- optional regular painting black or white

Appliance IPS-15

- high-mid unit for fix installation
- background music

Application IPS-15

- discotheque, clubs, bars, entertainment, meeting room

small variety of wide range for bass cabinets extension

