



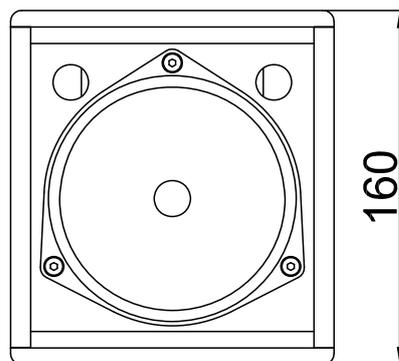

C-41

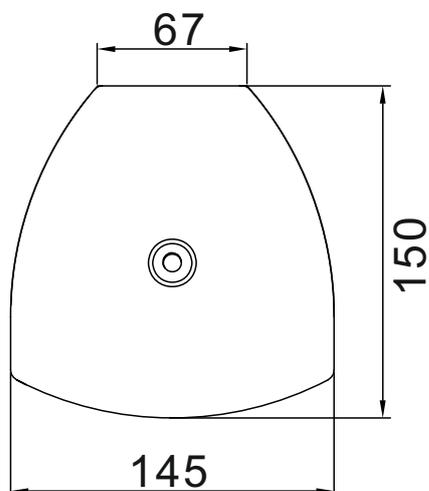

specification	
model	C-41
rated impedance (optional)	16Ω (8Ω)
operation mode	passive
power handling capacity passive AES/peak*	50W / 150W*
available frequency response**	120Hz-18kHz
max. sound pressure level***	113dB
directivity (h x v)	90° conical
LF-transducer rated size	4"
LF-transducer voice coil diameter	25mm/1"
LF-transducer magnet structure	ferrite
dimension h/w/d in mm	160/145/150
weight	1.9kg

* peak 10ms, with TD-8000 amplifier and C-41 max controller setup

** -10dB with C-41 FR controller setup

***1m free field, pink noise, crest factor 10dB, with TD-8000 and C-41 SPL controller setup



recommended subwoofer

Features C-41

- 1 x 4" speaker ferrite (25mm voice coil)
- 2 M8 mounting points
- 2 push terminals
- perforated steel front grill powder coated
- acoustic textile 2mm (on top)
- wood housing class A MDF 10mm
- polyurea (PU) high scratch proof coating
- optional regular painting black or white

Appliance C-41

- high-mid unit for fix installation
- background music
- delay line
- multimedia sound system
- surround cabinet

Application C-41

- bars & coffe shops
- shops
- meeting room
- home cinema
- home entertainment HiFi