

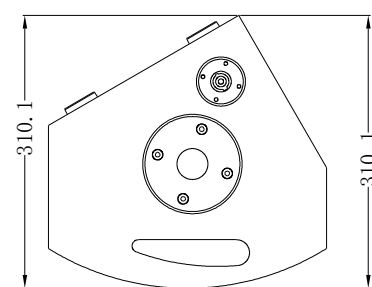
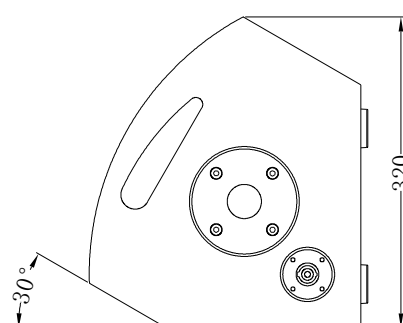
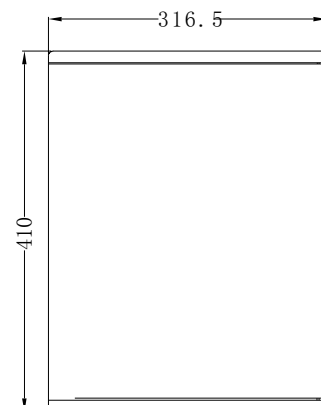


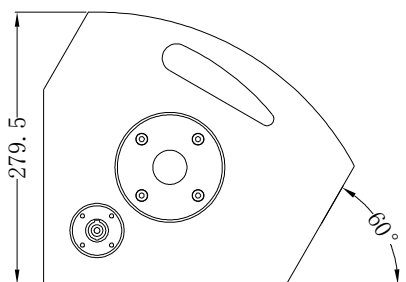

# CX-10

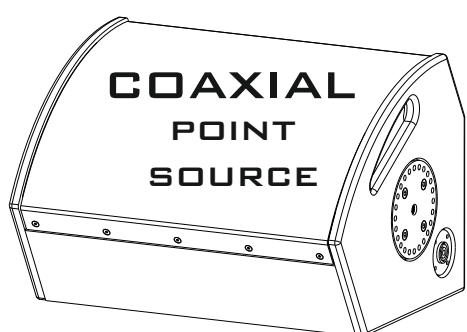

## specification


model	CX-10
rated impedance	8 Ω
operation mode	passive
power handling capacity passive AES/peak*	400W / 1200W*
available frequency response**	68Hz-20kHz
max. sound pressure level***	127dB
directivity (h x v)	80° conical
LF-transducer rated size	10"
LF-transducer voice coil diameter	64mm/2.5"
LF-transducer magnet structure	ferrite
HF-compression driver rated size (VC)	45mm/1.75"
HF-compression throat diameter	1"
HF-compression magnet structure	ferrite
dimension h/w/d in mm	410/317/310
weight	17.5kg

\* peak 10ms, with TD-8000 amplifier and CX-10 max controller setup


\*\* -10dB with CX-10 FR controller setup

\*\*\*1m free field, pink noise, crest factor 10dB, with TD-8000 and CX-10 SPL controller setup


## small variety of wide range for bass cabinets extension



Disco and Pub



Live-music and touring



Touring and installation

## Features CX-10

- 1x10"/1.75" coaxial speaker
- 10" transducer 64mm /2.5" voice coil
- 10" transducer ferrite magnet
- compression driver 1.75"/45mm voice coil
- compression driver ferrite magnet
- high frequency horn 1" throat
- horn directivity 80° conical
- multifunction housing
- wedge angle 30° and 60°
- 1 M10 mounting points
- 1 multi gauge plate 360° / 15° steps
- tripod (pole mounting) flange
- 4 Neutrik speakon 4-pin
- speakon terminals at 3 sides of the cabinet
- bass link function
- high-mid link function
- perforated steel front grill powder coated
- acoustic foam 4mm behind front grill
- wood housing plywood 15mm
- polyurea (PU) high scratch proof coating

## Appliance CX-10

- high-mid unit for fix installation
- floor monitor
- near fill
- delay line

## Application CX-10

- discotheque, clubs, bars, entertainment
- live events, live entertainment